

# Egeo

High-performance, connected and cost-effective heat pump water heater with or without a coil



## WI-FI CONNECTIVITY

Connect and control your water heater remotely with the **Cozytouch** application

**Models 200 to 250**  
(Floor-standing)

**Model 250 with coil**  
(Floor-standing)



### + durability

- ACI hybrid anti-corrosive protection
- Diamond-quality glass lining for long life and reliability
- Pressure relief valve
- Dielectric union
- Specific lip gasket to prevent rust around the flange



### + installation

- Ideal solution for an electric water heater replacement: no need to modify the electrical switchboard
- Next-generation cover attached with screws for easier opening and closing



- 1 **Wi-Fi connectivity**
- 2 **Waterdrop LED indicator:** amount of hot water ready to use
- 3 **Absence mode:** anti-frost position (7 °C)
- 4 **Manual mode:** required hot water amount selection
- 5 **Eco+ mode:** automatic operation based on daily consumer practices
- 6 **QR code** for easy pairing with Cozytouch

## To your customers



### + user-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions



### + comfort

- Low noise level (54 dB) for better comfort and integration
- Easy programming with quick mode selection
- Boost mode generates maximum heating when extra water is needed
- Connectivity & remote control via the Cozytouch application



### + energy savings

- New R290 refrigerant for increased energy savings
- Eco+ self learning mode to provide the right amount of hot water when needed
- Monitor water & electricity use with the Cozytouch application
- Absence mode: generates energy savings when away from home



- 1 Heat pump
- 2 Air inlet / outlet
- 3 Diamond-quality enamel tank for long life and reliability
- 4 ACI hybrid anti-corrosive protection
- 5 Sheathed stainless steel heating element
- 6 Electronic regulation for temperature control accuracy




Patented ACI hybrid technology guarantees you:

- + Permanent tank protection for all water types
- + Limited scaling and easy maintenance
- + Immediate, permanent protection thanks to the combined continuous current generated by the titanium anode and magnesium

### Installation dimensions

Model	Ref.	Dimensions (mm)					
		A	B	C	D	E	F
200	232516	1180	1529	277	959	575	636
250	232517	1432	1782	277	1199	575	636
250 (with coil)	886111	1432	1782	277	1199	575	636

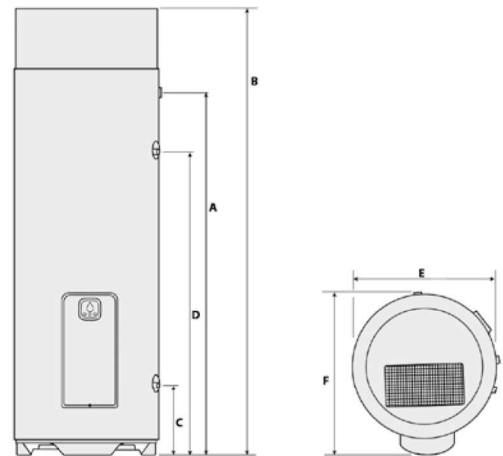

### Technical specifications

Model	Ref.	Voltage (V)	Maximum total power consumed by the device (W)	Power consumed by electric heating (W)	COP at 15 °c (ambient)	V40 ErP (L)	Heating time from 15 °C to 51 °C (ambient installation 15 °C air) (H)	Acoustic power (db(A))	Refrigerant fluid	Net weight without coil (kg)	ErP energy class
200	232516	230	2250	1800	2.4	270.5	3h42	54	R290	64	A+
250	232517	230	2250	1800	2.66	336.6	4h34	54	R290	71	A+
250L (with coil)	886111	230	2250	1800	2.5	337.9	4h35	54	R290	82	A+

