

Ground consoles

Field of application

- Installation of pipes, external devices of air conditioners, heat pumps etc. on the ground or on flat roofs

Advantages



- Easy installation on site
- Installation without penetrating the roof membrane
- Various sizes depending on the application and load case
- Integrated aluminium rail ensures straightforward use in outdoor areas
- Deinstallation at any time




Features

Length [mm]	Material	Temperature resistance	Max. recommended load (piece) [N] ¹⁾
250	Recycled, UV-resistant styrene butadiene rubber	-35 °C to +80 °C	1,600
400			2,400
600			4,500
1,000			6,450

¹⁾ Wind and snow loads need to be considered.

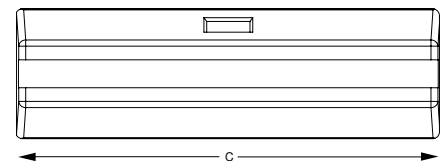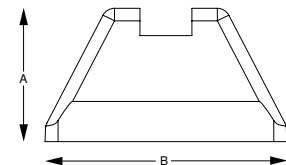

Length [mm]	Part no.	Sales unit	Pack unit	Weight [kg/piece]	Dimensions [mm]		
					A	B	C
250	172844	1	pieces	2.500	100	185	250
400	172845			4.300			400
600	171972			6.100			600
1,000	172053			11.400			1,000

 Consoles are supplied without attachment material.

We recommend the following MPR-Hammer head fasteners for mounting:

Connecting thread	Length [mm]	Part no.		
		Galvanised	Zinc lamella	Stainless steel
M10	35	151062	154198	154418
	40	151063	154199	
	55	151064	154200	
	60	151065	154201	
	80	151066	154202	
	100	151067	154203	
M12	40	151069	154204	154424
	55	151070	154205	
	60	151071	154206	
	80	151072	154207	
	100	151073	154208	